

Research Article

The Optimal L^2 Error Estimate of Stabilized Finite Volume Method for the Stationary Navier-Stokes Problem

Guoliang He,¹ Jian Su,² and Wenqiang Dai³

¹ School of Mathematical Science, University of Electronic Science and Technology, Chengdu 610054, China

² Faculty of Science, Xi'an Jiaotong University, Xi'an 710049, China

³ School of Management, University of Electronic Science and Technology, Chengdu 610054, China

Correspondence should be addressed to Guoliang He, hegl@uestc.edu.cn

Received 25 May 2012; Revised 13 August 2012; Accepted 30 August 2012

Academic Editor: Raytcho Lazarov

Copyright © 2012 Guoliang He et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

A finite volume method based on stabilized finite element for the two-dimensional stationary Navier-Stokes equations is analyzed. For the P_1 - P_0 element, we obtain the optimal L^2 error estimates of the finite volume solution u_h and p_h . We also provide some numerical examples to confirm the efficiency of the FVM. Furthermore, the effect of initial value for iterative method is analyzed carefully.

1. Introduction

In paper [1], G. He and Y. He introduce a finite volume method (FVM) based on the stabilized finite element method for solving the stationary Navier-Stokes problem and obtain the optimal H^1 error estimates for discretization velocity, however, to our dismay, without the optimal L^2 error estimate. It is inspiring that the following further numerical examples tell us that it has nearly second-order convergence rate. So, in this paper, we introduce a new technique to prove the optimal L^2 error of a generalized bilinear form and then gain the optimal L^2 error estimates of the stabilized finite volume method for the stationary Navier-Stokes problem.

For the convenience of analysis, we introduce the following useful notations. Let Ω be a bounded domain in \mathbb{R}^2 assumed to have a Lipschitz continuous boundary $\partial\Omega$ and to satisfy a further smooth condition to ensure the weak solution's existence and regularity of

Stokes problem. (For more information, see the A1 assumption stated in [1, 2].) We consider the stationary Navier-Stokes equations

$$\begin{aligned} -\nu\Delta u + (u \cdot \nabla)u + \nabla p &= f, \quad \operatorname{div} u = 0, \quad x \in \Omega, \\ u|_{\partial\Omega} &= 0, \end{aligned} \quad (1.1)$$

where $u = (u_1(x), u_2(x))$ represents the velocity vector, $p = p(x)$ the pressure, $f = f(x)$ the prescribed body force, and $\nu > 0$ the viscosity.

For the mathematical setting of problem (1.1), we introduce the following Hilbert spaces:

$$\begin{aligned} X &= \left(H_0^1(\Omega)\right)^2, \quad Y = \left(L^2(\Omega)\right)^2, \quad M = \left\{q \in L^2(\Omega) : \int_{\Omega} q \, dx = 0\right\}, \\ H &= \left\{v \in L^2(\Omega)^2; \operatorname{div} v = 0 \text{ in } \Omega, \quad v \cdot \mathbf{n}|_{\partial\Omega} = 0\right\}. \end{aligned} \quad (1.2)$$

The spaces $(L^2(\Omega))^m$ ($m = 1, 2, 4$) are endowed with the usual L^2 -scalar product (\cdot, \cdot) and norm $\|\cdot\|_0$, as appropriate. The space X is equipped with the scalar product $(\nabla u, \nabla v)$ and norm $\|\nabla u\|_0$.

Define $Au = -\Delta u$, which is the operator associated with the Navier-Stokes equations. It is positive self-adjoint operator from $D(A) = (H^2(\Omega))^2 \cap X$ onto Y , so, for $\alpha \in \mathbb{R}$, the power A^α of A is well defined. In particular, $D(A^{1/2}) = X$, $D(A^0) = Y$, and

$$\left(A^{1/2}u, A^{1/2}v\right) = (\nabla u, \nabla v), \quad \left\|A^{1/2}u\right\|_0 = (\nabla u, \nabla u)^{1/2}, \quad (1.3)$$

for all $u, v \in X$.

We also introduce the following continuous bilinear forms $a(\cdot, \cdot)$ and $d(\cdot, \cdot)$ on $X \times X$ and $X \times M$, respectively, by

$$a(u, v) = \nu((u, v)) \quad \forall u, v \in X, \quad d(v, q) = -(v, \nabla q) = (q, \operatorname{div} v) \quad \forall v \in X, q \in M, \quad (1.4)$$

a generalized bilinear form on $(X, M) \times (X, M)$ by

$$\mathcal{B}((u, p); (v, q)) = a(u, v) - d(v, p) + d(u, q), \quad (1.5)$$

and a trilinear form on $X \times X \times X$ by

$$b(u, v, w) = ((u \cdot \nabla)v, w) + \frac{1}{2}((\operatorname{div} u)v, w). \quad (1.6)$$

Under the above notations, the variational formulation of the problem (1.1) reads as follows: find $(u, p) \in (X, M)$ such that for all $(v, q) \in (X, M)$:

$$\mathcal{B}((u, p); (v, q)) + b(u, u, v) = (f, v). \quad (1.7)$$

The following existence and uniqueness results are classical (see [3]).

Theorem 1.1. Assume that v and $f \in Y$ satisfy the following uniqueness condition:

$$1 - \frac{N_1}{\nu^2} \|f\|_{-1} > 0, \quad (1.8)$$

where

$$N_1 = \sup_{u,v,w \in H_0^1(\Omega)} \frac{b(u,v,w)}{\|A^{1/2}u\|_0 \|A^{1/2}v\|_0 \|A^{1/2}w\|_0}. \quad (1.9)$$

Then the problem (1.7) admits a unique solution $(u, p) \in (D(A) \cap X, H^1(\Omega) \cap M)$ such that

$$\|A^{1/2}u\|_1 \leq \nu^{-1} \|f\|_{-1}, \quad \|u\|_2 + \|p\|_1 \leq c \|f\|_0. \quad (1.10)$$

2. FVM Based on Stabilized Finite Element Approximation

In this section, we consider the FVM for two-dimensional stationary incompressible Navier-Stokes equations (1.1). Let $h > 0$ be a real positive parameter. The finite element subspace (X_h, M_h) of (X, M) is characterized by $T_h = T_h(\Omega)$, a partition of $\bar{\Omega}$ into triangles, assumed to be regular in the usual sense (see [4–7]). The mesh parameter h is given by $h = \max\{h_K\}$, and the set of all interelement boundaries will be denoted by Γ_h . Besides, we also use the configuration based on barycenter of element $K_i \in T_h$ to construct a dual partition T_h^* of T_h , which is shown in Figure 1.

Finite element subspaces of interest in this paper are defined as follows: the continuous piecewise linear velocity subspace

$$X_h = \left\{ v \in X : v|_K \in (P_1(K))^2, \forall K \in T_h \right\}, \quad (2.1)$$

the piecewise constant pressure subspace

$$M_h = \{ q \in M : q|_K \in P_0(K), \forall K \in T_h \}, \quad (2.2)$$

and the dual space of velocity subspace X_h^*

$$X_h^* = \left\{ v \in (L^2(\Omega))^2 : v|_{K^*} \in (P_0(K^*))^2, \forall K^* \in T_h^* \right\}. \quad (2.3)$$

Actually, this choice of X_h^* is the span of the characteristic functions of the volume K^* . Note that this mixed finite element method is unstable in the standard Babuška-Brezzi sense [8].

Define the interpolation operator $I_h^* : X_h \rightarrow X_h^*$,

$$I_h^* u_h = \sum_{x_i \in N_h} u_h(x_i) \chi_i(x), \quad (2.4)$$

where $N_h = \{P_i : \text{Vertices of triangles in } T_h\}$.

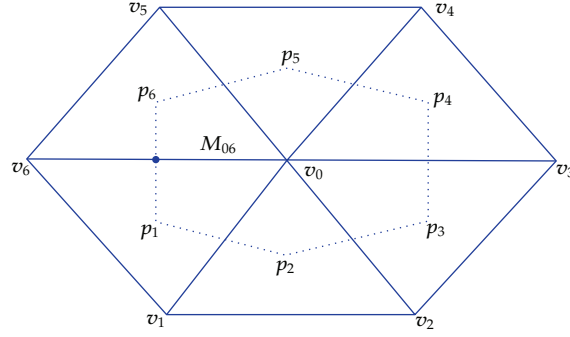


Figure 1: The partition and dual partition of a triangular.

Let us introduce the continuous bilinear forms $\tilde{a}(\cdot, \cdot)$, $\tilde{d}(\cdot, \cdot)$, and $d(\cdot, \cdot)$ on $X_h \times X_h$, $X_h \times M_h$ and $X_h \times M_h$ as follows:

$$\begin{aligned} \tilde{a}(u_h, I_h^* v_h) &= \nu((u_h, I_h^* v_h)) = -\nu \sum_{K_i^* \in \mathcal{T}_h^*} \int_{\partial K_i^*} v_h(x_i) \frac{\partial u_h}{\partial \mathbf{n}} ds, \quad \forall u_h, v_h \in X_h, \\ \tilde{d}(I_h^* v_h, p_h) &= (I_h^* v_h, \nabla p_h) = \sum_{K_i^* \in \mathcal{T}_h^*} \int_{\partial K_i^*} v_h(x_i) p_h \cdot \mathbf{n} ds, \quad \forall u_h \in X_h, p_h \in M_h, \\ d(u_h, q_h) &= -(u_h, \nabla q_h) = (q_h, \operatorname{div} u_h), \quad \forall u_h \in X_h, q_h \in M_h, \end{aligned} \quad (2.5)$$

where \mathbf{n} is the out normal vector. We also define the trilinear forms $\tilde{b}(\cdot, \cdot, \cdot)$ on $X_h \times X_h \times X_h$ by

$$\tilde{b}(u_h, v_h, I_h^* w_h) = ((u_h \cdot \nabla) v_h, I_h^* w_h), \quad (2.6)$$

for all $u_h, v_h, w_h \in X_h$, the right side of term

$$(f, I_h^* v_h) = \sum_{K_i^* \in \mathcal{T}_h^*} \int_{K_i^*} v_h(x_i) f dx, \quad \forall v_h \in X_h, \quad (2.7)$$

and a generalized bilinear form on

$$\tilde{B}((u_h, p_h); (I_h^* v_h, q_h)) = \tilde{a}(u_h, I_h^* v_h) - \tilde{d}(I_h^* v_h, p_h) + d(u_h, q_h). \quad (2.8)$$

Based on the dual partition and bilinear forms defined above, this paper still introduces the norms and seminorms [1, 9]:

$$\begin{aligned}\|u_h\|_{0,h} &= \left(\sum_{K \in T_h} \|u_h\|_{0,h,K}^2 \right)^{1/2}, \\ \|\tilde{A}_h^{1/2} u_h\|_0 &= \left(\sum_{K \in T_h} \|\tilde{A}_h^{1/2} u_h\|_{0,h,K}^2 \right)^{1/2}, \\ \|u_h\|_{1,h} &= \left(\|u_h\|_{0,h}^2 + \|\tilde{A}_h^{1/2} u_h\|_0^2 \right)^{1/2},\end{aligned}\tag{2.9}$$

where

$$\begin{aligned}\|u_h\|_{0,h,K} &= \left[\frac{S_v}{3} (u_{P_i}^2 + u_{P_j}^2 + u_{P_k}^2) \right]^{1/2}, \\ \|\tilde{A}_h^{1/2} u_h\|_{0,h,K} &= \left\{ \left[\left(\frac{\partial u_h(p)}{\partial x} \right)^2 + \left(\frac{\partial u_h(p)}{\partial y} \right)^2 \right] S_v \right\}^{1/2},\end{aligned}\tag{2.10}$$

with S_v the area of $\Delta v_i v_j v_k$ (see Figure 1).

Formally, there are some differences between $\|u_h\|_{0,h}$, $\|\tilde{A}_h^{1/2} u_h\|_0$ and $\|u_h\|_0$, $\|A_h^{1/2} u_h\|_0$, respectively, but we, actually, have the following results [9–12].

Lemma 2.1. *There exist constants c_1, c_2 , independent of h , such that*

$$\begin{aligned}c_1 \|u_h\|_{0,h} &\leq \|u_h\|_0 \leq c_2 \|u_h\|_{0,h}, \quad \forall u_h \in X_h, \\ \|\tilde{A}_h^{1/2} u_h\|_0 &= \|A_h^{1/2} u_h\|_0, \quad \forall u_h \in X_h.\end{aligned}\tag{2.11}$$

So, for simplicity, we also denote $\|u_h\|_{0,h}$ and $\|u_h\|_{1,h}$ by $\|u_h\|_0$ and $\|u_h\|_1$, respectively, without confusion. Below c (with or without a subscript) is a generic positive constant.

For the above finite element spaces X_h and M_h , it is well known that the following approximation properties and inverse inequality

$$\begin{aligned}\|A_h^{1/2} v\|_0 &\leq ch^{-1} \|v\|_0, \quad \forall v \in X_h, \\ \|v - I_h v\|_0 + h \|A_h^{1/2} (v - I_h v)\|_0 &\leq ch^2 \|A_h v\|_0, \quad \forall v \in D(A), \\ \|v - I_h^* v\|_0 &\leq ch \|A_h^{1/2} v\|_0, \quad \forall v \in X_h, \\ \|q - J_h q\|_0 &\leq ch \|q\|_1, \quad \forall q \in H^1(\Omega) \cap M\end{aligned}\tag{2.12}$$

hold (see [4, 13]), where $I_h : D(A) \rightarrow X_h$ is the interpolation operator and $J_h : H^1(\Omega) \cap M \rightarrow M_h$ is the L^2 -orthogonal projection.

In order to define a locally stabilized formulation of the stationary Navier-Stokes problem, we also need a *macroelement partition* Λ_h as follows: Given any subdivision T_h , a macroelement partition Λ_h may be defined such that each macroelement \mathcal{K} is a connected set of adjoining elements from T_h . Every element K must lie in exactly one macroelement. For each \mathcal{K} , the set of interelement edges which are strictly in the interior of \mathcal{K} will be denoted by $\Gamma_{\mathcal{K}}$, and the length of an edge $e \in \Gamma_{\mathcal{K}}$ is denoted by h_e . For a macroelement \mathcal{K} the restricted pressure space is given by

$$M_{0,h} = \left\{ q \in L_0^2(\mathcal{K}) : q|_K \in P_0(K), \forall K \in \mathcal{K} \right\}. \quad (2.13)$$

With the above choices of the velocity-pressure finite element spaces X_h, X_h^*, M_h and these additional definitions, a locally stabilized formulation of the Navier-Stokes problem (1.1) can be stated as follows.

Definition 2.2 (locally stabilized FVM formulation). Find $(u_h, p_h) \in (X_h, M_h)$, such that for all $(v, q) \in (X_h, M_h)$

$$\tilde{\mathcal{B}}_h((u_h, p_h); (I_h^* v, q)) + \tilde{b}(u_h, u_h, I_h^* v_h) = (f, I_h^* v), \quad (2.14)$$

where

$$\begin{aligned} \tilde{\mathcal{B}}_h((u_h, p_h); (I_h^* v, q)) &= \tilde{\mathcal{B}}((u_h, p_h); (I_h^* v, q)) + \beta \mathcal{C}_h(p_h, q), \quad \forall (u_h, p_h), (v, q) \in (X_h, M_h), \\ \mathcal{C}_h(p, q) &= \sum_{\mathcal{K} \in \Lambda_h} \sum_{e \in \Gamma_{\mathcal{K}}} h_e \int_e [p]_e [q]_e ds, \end{aligned} \quad (2.15)$$

for all p, q in the algebraic sum $H^1(\Omega) + M_h$, and $[\cdot]_e$ is the jump operator across $e \in \Gamma_{\mathcal{K}}$ and $\beta > 0$ is the local stabilization parameter.

A general framework for analyzing the locally stabilized formulation (2.14) can be developed using the notion of equivalence class of macroelements. As in Stenberg [14], each equivalence class, denoted by $\tilde{\mathcal{E}}_{\mathcal{K}}$, contains macroelements which are topologically equivalent to a reference macroelement \mathcal{K} . See [1, 2] to get some examples.

The following stability results of these mixed methods for the macroelement partition defined above were formally established by Kay and Silvester [6] and Kechkar and Silvester [7]. Throughout the paper we will assume that $\beta \geq \beta_0$.

Theorem 2.3. *Given a stabilization parameter $\beta \geq \beta_0 > 0$, suppose that every macroelement $\mathcal{K} \in \Lambda_h$ belongs to one of the equivalence classes $\tilde{\mathcal{E}}_{\mathcal{K}}$, and that the following macroelement connectivity condition is valid: for any two neighboring macroelements \mathcal{K}_1 and \mathcal{K}_2 with $\int_{\mathcal{K}_1 \cap \mathcal{K}_2} ds \neq 0$, there exists $v \in X_h$ such that*

$$\text{supp } v \subset \mathcal{K}_1 \cup \mathcal{K}_2, \quad \int_{\mathcal{K}_1 \cap \mathcal{K}_2} v \cdot n ds \neq 0. \quad (2.16)$$

Then,

$$\|C_h(p, q)\|_0 \leq c \sum_{K \in \mathcal{T}_h} \left(\int_K (\|p\|_0^2 + h^2 \|\nabla p\|_0^2) dx \right)^{1/2} \left(\int_K (\|q\|_0^2 + h^2 \|\nabla q\|_0^2) dx \right)^{1/2}, \quad (2.17)$$

for all $p, q \in H^1(\Omega) + M_h$, and

$$C_h(p, q_h) = 0, \quad C_h(p_h, q) = 0, \quad C_h(p, q) = 0 \quad \forall p, q \in H^1(\Omega), p_h, q_h \in M_h, \quad (2.18)$$

where $c > 0$ is a constant independent of h and β , and β_0 is some fixed positive constant.

3. Error Estimates

In order to derive error estimates of (u_h, p_h) in the FVM, we need the existence and some regularities of the variational problem (2.14) (see [1]).

Lemma 3.1. *Under the assumptions of Theorem 2.3, there exist constants γ and $\alpha > 0$ such that*

$$v \left\| \tilde{A}_h^{1/2} u_h \right\|_0^2 + \beta C_h(p_h, p_h) = \tilde{\mathcal{B}}_h((u_h, p_h); (I_h^* u_h, p_h)), \quad (3.1)$$

$$\left| \tilde{\mathcal{B}}_h((u_h, p_h); (I_h^* v_h, q_h)) \right| \leq \gamma \left(\left\| \tilde{A}_h^{1/2} A u_h \right\|_0 + \|p_h\|_0 \right) \left(\left\| \tilde{A}_h^{1/2} A v_h \right\|_0 + \|q_h\|_0 \right), \quad (3.2)$$

$$\alpha \left(\left\| \tilde{A}_h^{1/2} u_h \right\|_0 + \|p_h\|_0 \right) \leq \sup_{(v_h, q_h) \in (X_h, M_h)} \frac{\tilde{\mathcal{B}}_h((u_h, p_h); (I_h^* v_h, q_h))}{\left\| \tilde{A}_h^{1/2} v_h \right\|_0 + \|q_h\|_0} \quad (3.3)$$

hold for all (u_h, p_h) and $(v_h, q_h) \in (X_h, M_h)$.

For the trilinear terms $\tilde{b}(u, v_h, I_h^* w_h)$ and $\tilde{b}(v_h, u, I_h^* w_h)$, the following properties are useful [1, 2]. Set

$$\begin{aligned} N_2 &= \sup_{u, v_h, w_h \in H_0^1(\Omega)} \frac{\tilde{b}(u, v_h, I_h^* w)}{\|A^{1/2} u\|_0 \left\| \tilde{A}_h^{1/2} v \right\|_0 \left\| \tilde{A}_h^{1/2} w \right\|_0}, \\ N_3 &= \sup_{u, v_h, w_h \in H_0^1(\Omega)} \frac{\tilde{b}(v_h, u, I_h^* w)}{\left\| \tilde{A}_h^{1/2} v \right\|_0 \|A^{1/2} u\|_0 \left\| \tilde{A}_h^{1/2} w \right\|_0}, \\ N &= \max\{N_1, N_2, N_3\}. \end{aligned} \quad (3.4)$$

Lemma 3.2. *The trilinear form \tilde{b} satisfies*

$$\left| \tilde{b}(u_h, v_h, I_h^* w_h) \right| \leq c \left\| \tilde{A}_h u_h \right\|_0^{1/2} \left\| \tilde{A}_h^{1/2} u_h \right\|_0^{1/2} \left\| \tilde{A}_h^{1/2} v_h \right\|_0 \left\| \tilde{A}_h w_h \right\|_0^{1/2} \left\| \tilde{A}_h^{1/2} w_h \right\|_0^{1/2}, \quad (3.5)$$

for any $u_h, v_h, w_h \in X_h$.

Lemma 3.3. *Suppose the assumptions of Theorem 2.3 and (3.4) hold, and the body force f satisfies the following uniqueness condition:*

$$1 - \frac{4N}{\nu^2} \|f\|_{-1} > 0. \quad (3.6)$$

Then there exists a unique solution (u_h, p_h) of problem (2.14) satisfying the following estimate:

$$\nu \left\| \tilde{A}_h^{1/2} u_h \right\|_0^2 + \|p_h\|_0^2 \leq \kappa, \quad (3.7)$$

$$\left\| \tilde{A}_h^{1/2} (u - u_h) \right\|_0 + \|p - p_h\|_0 \leq \kappa h. \quad (3.8)$$

In order to derive error estimates of the stabilized finite volume solution (u_h, p_h) , we need the following Galerkin projection $(\tilde{R}_h, \tilde{Q}_h) : (X, M) \rightarrow (X_h, M_h)$ defined by

$$\tilde{B}_h \left((\tilde{R}_h(v, q), \tilde{Q}_h(v, q)); (I_h^* v_h, q_h) \right) = \tilde{B}((v, q); (I_h^* v_h, q_h)) \quad \forall (v_h, q_h) \in (X_h, M_h), \quad (3.9)$$

for each $(v, q) \in (X, M)$.

Note that, due to Lemma 3.1, $(\tilde{R}_h, \tilde{Q}_h)$ is well defined. Now, we derive the following optimal L^2 error estimate of u_h and p_h defined in (3.9). Using an argument similar to ones used by Layton and Tobiska in [15], the following approximate properties can be obtained.

Lemma 3.4. *Under the assumptions of Lemma 3.3, the projection (R_h, Q_h) satisfies*

$$\left\| \tilde{A}_h^{1/2} (v - \tilde{R}_h(v, q)) \right\|_0 + \|q - \tilde{Q}_h(v, q)\|_0 \leq c \left(\|A^{1/2} v\|_0 + \|q\|_0 \right), \quad (3.10)$$

for all $(v, q) \in (X, M)$,

$$\left\| \tilde{A}_h^{1/2} (v - \tilde{R}_h(v, q)) \right\|_0 + \|q - \tilde{Q}_h(v, q)\|_0 \leq ch \left(\|Av\|_0 + \|A^{1/2} q\|_0 \right), \quad (3.11)$$

for all $(v, q) \in (D(A), H^1(\Omega) \cap M)$, and

$$\left\| v - \tilde{R}_h(v, q) \right\|_0 + h \left\| \tilde{A}_h^{1/2} (v - \tilde{R}_h(v, q)) \right\|_0 + h \|q - \tilde{Q}_h(v, q)\|_0 \leq ch^2 (\|Av\|_0 + \|q\|_1), \quad (3.12)$$

for all $(v, q) \in (D(A), H^1(\Omega) \cap M)$.

Proof. Equations (3.10) and (3.11) is the directly from [1]. Next, let $(v, q) \in (D(A), H^1(\Omega) \cap M)$ and introduce the dual Stokes problem: find $(\Phi, \Psi) \in (X, M)$ such that

$$\tilde{B}((w, r); (\Phi, \Psi)) = \left(w, I_h^* (v - \tilde{R}_h(v, q)) \right), \quad \forall (w, r) \in (X, M). \quad (3.13)$$

Using the regularity assumption of Stokes problem (See the A1 assumption in [1, 2]), there holds

$$\|\Phi\|_2 + \|\Psi\|_1 \leq c \left\| v - \tilde{R}_h(v, q) \right\|_0. \quad (3.14)$$

Now, setting $w = v - \tilde{R}_h(v, q)$, $r = q - \tilde{Q}_h(v, q)$, using (2.18) and (3.9), we obtain that for $(\Phi_h, \Psi_h) = (I_h^* \Phi, J_h \Psi) \in (X_h, M_h)$,

$$\begin{aligned} \left\| v - \tilde{R}_h(v, q) \right\|_0^2 &= \tilde{\mathcal{B}}\left(\left(v - \tilde{R}_h(v, q), q - \tilde{Q}_h(v, q)\right); (\Phi, \Psi)\right) \\ &= \tilde{\mathcal{B}}_h\left(\left(v - \tilde{R}_h(v, q), q - \tilde{Q}_h(v, q)\right); (\Phi, \Psi)\right) \\ &= \tilde{\mathcal{B}}_h\left(\left(v - \tilde{R}_h(v, q), q - \tilde{Q}_h(v, q)\right); (\Phi - \Phi_h, \Psi - \Psi_h)\right) \\ &= \tilde{a}\left(v - \tilde{R}_h(v, q), I_h^*(\Phi - \Phi_h)\right) \\ &\quad - \tilde{d}\left(I_h^*(\Phi - \Phi_h), q - \tilde{Q}_h(v, q)\right) \\ &\quad + d\left(v - \tilde{R}_h(v, q), \Psi - \Psi_h\right). \end{aligned} \quad (3.15)$$

For any $v_h \in X_h$, we have [9–11]

$$\begin{aligned} \tilde{a}\left(v - \tilde{R}_h(v, q), I_h^*(\Phi - \Phi_h)\right) &= \left(\Delta\left(\left(v - \tilde{R}_h(v, q)\right) - I_h\left(v - \tilde{R}_h(v, q)\right)\right), I_h^*(\Phi - \Phi_h)\right), \\ \left\| \tilde{d}\left(I_h^*(\Phi - \Phi_h), q - \tilde{Q}_h(v, q)\right) \right\|_0 &\leq c \left\| d\left((\Phi - \Phi_h), q - \tilde{Q}_h(v, q)\right) \right\|_0. \end{aligned} \quad (3.16)$$

Since the dual partition is formed by the barycenter, similar calculation in [10, 11, 16] allows us to have

$$\begin{aligned} \left\| \tilde{a}\left(v - \tilde{R}_h(v, q), I_h^*(\Phi - \Phi_h)\right) \right\|_0 &\leq \kappa h^2 \left\| v - \tilde{R}_h(v, q) \right\|_0 \\ &\quad \times \left(\left\| \tilde{A}_h^{1/2} u_h \right\|_0 + \|u\|_2 + \|f\|_1 + \left\| \tilde{A}_h^{1/2} \left(v - \tilde{R}_h(v, q)\right) \right\|_0 \right), \end{aligned} \quad (3.17)$$

$$\begin{aligned} \left\| \tilde{d}\left(I_h^*(\Phi - \Phi_h), q - \tilde{Q}_h(v, q)\right) \right\|_0 &\leq c \left\| d\left((\Phi - \Phi_h), q - \tilde{Q}_h(v, q)\right) \right\|_0 \\ &\leq c \|\nabla(\Phi - \Phi_h)\|_0 \left\| q - \tilde{Q}_h(v, q) \right\|_0. \end{aligned} \quad (3.18)$$

By (3.10), (3.11), and (3.14), we have

$$\begin{aligned} \left\| \tilde{d}\left(I_h^*(\Phi - \Phi_h), q - \tilde{Q}_h(v, q)\right) \right\|_0 &\leq ch^2 \|A\Phi\|_0 \left(\|Av\|_0 + \left\| A^{1/2} q \right\|_0 \right) \\ &\leq ch^2 \left\| v - \tilde{R}_h(v, q) \right\|_0 \left(\|Av\|_0 + \left\| A^{1/2} q \right\|_0 \right). \end{aligned} \quad (3.19)$$

Since $C_h(p, q_h) = 0$, for all $p \in (H^1(\Omega) \cap M)$, for all $q_h \in M_h$, similarly in [7], we have

$$\begin{aligned} \left\| \left(\operatorname{div} \left(v - \tilde{R}_h(v, q) \right), \Psi - \Psi_h \right) \right\|_0 &\leq ch \left\| \nabla \left(v - \tilde{R}_h(v, q) \right) \right\|_0 \|\Psi\|_1 \\ &\leq \kappa h^2 (\|u\|_2 + \|p\|_1) \left\| \left(v - \tilde{R}_h(v, q) \right) \right\|_0. \end{aligned} \quad (3.20)$$

Finally, combining (3.10) with (3.17), (3.19), and (3.20) yields (3.12). \square

Next, we will derive the following error estimates of the finite element solution (u_h, p_h) defined in Section 2.

Theorem 3.5. *Assume that the assumptions of Lemma 3.3 hold. Then the stabilized finite element solution (u_h, p_h) satisfies the error estimates*

$$\|u - u_h\|_0 + h \left(\left\| \tilde{A}_h^{1/2} (u - u_h) \right\|_0 + \|p - p_h\|_0 \right) \leq ch^2. \quad (3.21)$$

Proof. It is well known that the weak solutions $(u, p) \in (D(A) \cap V, H^1(\Omega) \cap M)$. Hence, we derive from (2.14) and (3.9) that for all $(v_h, q_h) \in (X_h, M_h)$

$$\mathcal{B}_h((e_h, \eta_h); (I_h^* v_h, q_h)) + \tilde{b}(u - u_h, u, I_h^* v_h) + \tilde{b}(u_h, u - u_h, I_h^* v_h) = 0, \quad (3.22)$$

where $e_h = \tilde{R}_h(u, p) - u_h$ and $\eta_h = \tilde{Q}_h(u, p) - p_h$. Taking $(v, q) = (e_h, \eta_h)$ in (3.22), we obtain

$$\begin{aligned} v \left\| \tilde{A}_h^{1/2} e_h \right\|_0^2 + \beta_0 C_h(\eta_h, \eta_h) + \tilde{b}(e_h, u, I_h^* e_h) + \tilde{b}(u, e_h, I_h^* e_h) \\ \leq \left| b(u - \tilde{R}_h(u, p), u, e_h) \right| + \left| b(u_h, u - \tilde{R}_h(u, p), e_h) \right|. \end{aligned} \quad (3.23)$$

We find from (1.10), (3.1), (3.4), and (3.6) that

$$\begin{aligned} v \left\| \tilde{A}_h^{1/2} e_h \right\|_0^2 - \left| \tilde{b}(e_h, u, I_h^* e_h) \right| - \left| \tilde{b}(u, e_h, I_h^* e_h) \right| &\geq v \left\| \tilde{A}_h^{1/2} e_h \right\|_0^2 - 2N \left\| A_h^{1/2} u \right\|_0 \left\| \tilde{A}_h^{1/2} e_h \right\|_0^2 \\ &\geq v \left(1 - 2 \|f\|_0 v^{-2} \right) \left\| \tilde{A}_h^{1/2} e_h \right\|_0^2. \end{aligned} \quad (3.24)$$

Moreover, By (3.5), (3.11), and Poincaré's estimate, we have

$$\begin{aligned}
& \left\| \tilde{b}(u_h, u - \tilde{R}_h(u, p), e_h) \right\|_0 + \left\| \tilde{b}(u - \tilde{R}_h(u, p), u, e_h) \right\|_0 \\
& \leq \left\| \tilde{b}(u, u - \tilde{R}_h(u, p), e_h) \right\|_0 + \left\| \tilde{b}(u - \tilde{R}_h(u, p), u, e_h) \right\|_0 \\
& \quad + \left\| \tilde{b}(u - \tilde{R}_h(u, p), u - \tilde{R}_h(u, p), e_h) \right\|_0 + \left\| \tilde{b}(e_h, u - \tilde{R}_h(u, p), e_h) \right\|_0 \\
& \leq c_1 \|Au\|_0 \left\| \tilde{A}_h^{1/2}(u - \tilde{R}_h(u, p)) \right\|_0 \left\| \tilde{A}_h^{1/2} e_h \right\|_0 \\
& \quad + c_2 \left(\left\| \tilde{A}_h^{1/2}(u - \tilde{R}_h(u, p)) \right\|_0 + \left\| \tilde{A}_h^{1/2} e_h \right\|_0 \right) \left\| \tilde{A}_h^{1/2}(u - \tilde{R}_h(u, p)) \right\|_0 \left\| \tilde{A}_h^{1/2} e_h \right\|_0 \\
& \leq ch^2 \left\| \tilde{A}_h^{1/2} e_h \right\|_0.
\end{aligned} \tag{3.25}$$

Combining the above estimates with (3.24) and using the uniqueness condition (3.4) yield

$$\left\| \tilde{A}_h^{1/2} e_h \right\|_0 \leq ch^2. \tag{3.26}$$

Finally, one finds from (3.12) and (3.26) that

$$\|u - u_h\|_0 \leq \|e_h\|_0 + \|u - R_h(u, p)\|_0 \leq c_3 \left\| \tilde{A}_h^{1/2} e_h \right\|_0 + ch^2 (\|Au\|_0 + \|p\|_1) \leq ch^2. \tag{3.27}$$

Hence, combining the above estimates with (3.8) gives (3.21). \square

4. Numerical Example

For stationary Navier-Stokes problem, the iteration scheme, in general, is

$$\begin{aligned}
\nu Av + N(v)v + Bp &= f \\
-B^T v + \beta C &= 0.
\end{aligned} \tag{4.1}$$

The submatrices occurring in (4.1) correspond to differential operators as $A \sim -\text{diag}(\nu\Delta)$, $N(v) \sim v \cdot \nabla$, $B \sim \nabla$, $-B^T \sim \text{div}$, and $C \sim \mathcal{C}_h(\cdot, \cdot)$. The right-hand side f contains information from the source information.

In general, this problem can be solved by the following Newton method:

$$\begin{aligned}
(1) \quad R &= f - \left(\nu Av^{\text{old}} + N(v^{\text{old}}) \right) v^{\text{old}} - Bp^{\text{old}}, \quad r = -B^T v^{\text{old}}, \\
(2) \quad \left(\nu Av^{\text{mid}} + N(v^{\text{old}}) \right) v^{\text{mid}} + N(v^{\text{mid}}) v^{\text{old}} + Bp^{\text{mid}} &= R, \quad B^T v^{\text{mid}} = r; \\
(3) \quad v^{\text{new}} &= v^{\text{old}} + v^{\text{mid}}, \quad p^{\text{new}} = p^{\text{old}} + p^{\text{mid}},
\end{aligned} \tag{4.2}$$

where R, r are the so-called nonlinear residual. Actually the difference between (4.2) and (4.1) is that, in computing the corrections v^{mid} and p^{mid} from R, r , the quadratic term $N(v^{\text{mid}})v^{\text{mid}}$ deduced from (4.1) is dropped and gives the linear problem (4.2).

4.1. Numeric Example I

Consider a unit square domain with an exact solution given by

$$\begin{aligned} u(x, y) &= (u_1(x, y), u_2(x, y)), & p(x, y) &= 10(2x - 1)(2y - 1), \\ u_1(x, y) &= 10x^2(x - 1)^2y(y - 1)(2y - 1), & u_2(x, y) &= -10x(x - 1)(2x - 1)y^2(y - 1)^2. \end{aligned} \quad (4.3)$$

f is determined by (1.1). After some computation using stretched grid, we have the following results.

Figure 2 is the relative error and convergence rate of velocity and pressure when $\nu = 0.005$, $\beta = 10$. Table 1 lists the different errors and convergence rates of numerical velocity and pressure for the same ν and β . From the figure and table, we can see that the almost second-order L^2 convergence is obtained, which confirms our theoretical prediction.

Figure 3 is the L^2 relative error of numerical velocity versus the number of iterate steps for different ν . The figure tells us the numerical velocities, in general, converge very fast. Moreover, the figure also tells the bigger the ν , the faster the convergence speed, which is consistent with the really case. If ν is not too small, for example, $\nu \geq 0.01$, only several Newton iterations are needed.

4.2. Numeric Example II

The second example is the classical lid-driven flow governed by stationary Navier-Stokes equations in a square cavity. We impose watertight boundary conditions, that is, $u_x(0, 1) = u_x(1, 1) = 0$ and $u_x = 1$, for $0 < x < 1$. From the streamlines in Figures 4–7, we can see there are some different performances for different ν for the problem based on the stretched grid [16, 17] (with 128×128 grid).

The left subplot in Figure 4 is the velocity solution of Stokes problem which serves as the initial guess of Newton method; the right subplot in Figure 4 is the nonconvergence numeric velocity with that initial guess and 9 times Newton iterations. From Figure 4, we can see that there is a different performance from Numerical Example I for the lid-driven flow; if the ν is smaller, the initial value needed in Newton iteration has to be nearer the exact solution. The nonconvergence indicates that we must have a good initiate value for Newton iteration. For the $\nu = 0.001$, the usual Stokes initial value is not sufficient and a better initial value is needed, which can be computed by the following Picard method:

$$\begin{aligned} (1) \quad R &= f - \left(\nu A v^{\text{old}} + N(v^{\text{old}}) \right) v^{\text{old}} - B p^{\text{old}}, & r &= -B^T v^{\text{old}}, \\ (2) \quad \left(\nu A v^{\text{mid}} + N(v^{\text{old}}) \right) v^{\text{mid}} + B p^{\text{mid}} &= R, & B^T v^{\text{mid}} &= r; \\ (3) \quad v^{\text{new}} &= v^{\text{old}} + v^{\text{mid}}, & p^{\text{new}} &= p^{\text{old}} + p^{\text{mid}}. \end{aligned} \quad (4.4)$$

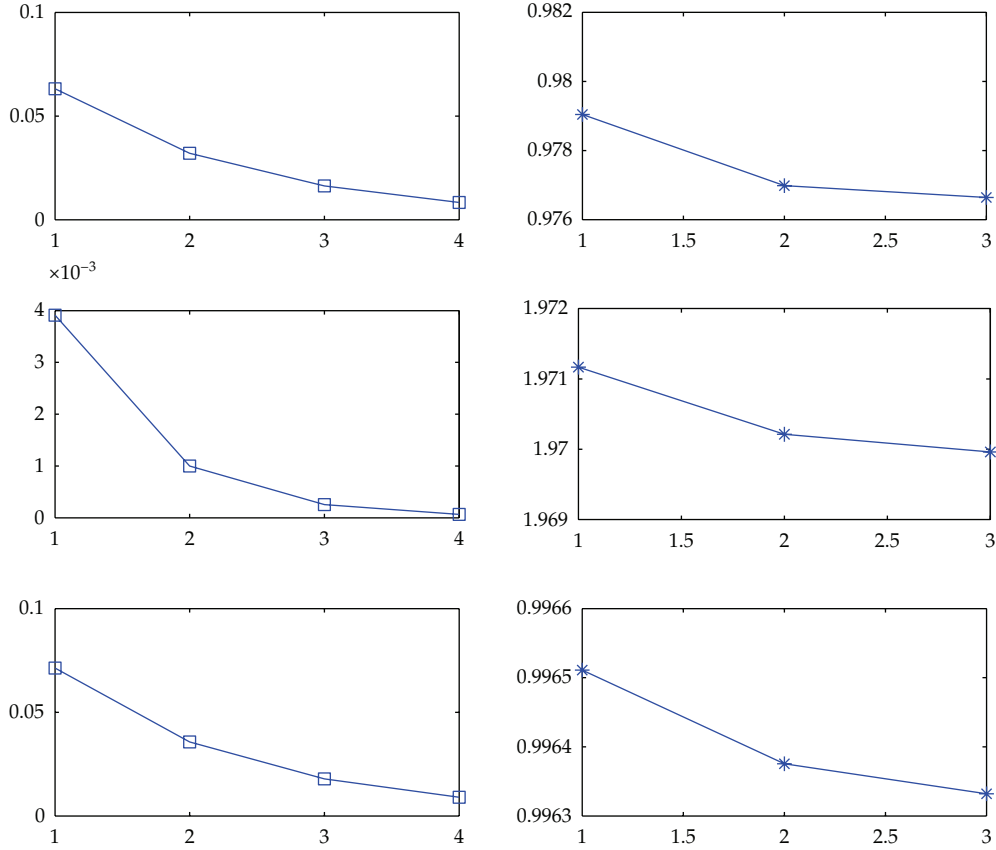


Figure 2: The relative errors and convergence rates of velocity and pressure.

Table 1: Numerical results of the FVM ($\nu = 0.005$, $\beta = 10$).

h	$\ \tilde{A}_h^{1/2}(u - u_h)\ _0 / \ \tilde{A}_h^{1/2}u\ _0$	Con. rate	$\ u - u_h\ _0 / \ u\ _0$	Con. rate	$\ p - p_h\ _0 / \ p\ _0$	Con. rate
1/16	0.06316279	—	0.00391173	—	0.07127911	—
1/32	0.03204341	0.97904713	0.00099767	1.97116812	0.03572585	0.99651095
1/64	0.01627933	0.97698618	0.00025462	1.97021278	0.01790786	0.99637536
1/128	0.00827253	0.97664010	0.00006499	1.96996167	0.00897672	0.99633198

The difference between Picard method and Newton method is that the linear term $N(v^{\text{mid}})v^{\text{old}}$ is also dropped from (4.2), and thus the Picard method commonly referred to as the Oseen system.

The left subplot in Figure 5 is the initial velocity for the Newton iteration based on two Picard iterations without Newton iteration, and the right subplot in Figure 5 is the streamlines of the convergence numeric velocity evaluated at the 2 Picard iterations, using 4 times Newton iterations.

Figures 6 and 7 give the behavior of different iteration results for $\nu = 0.001$ and $\nu = 0.00033$. From these figures, we can see that if ν is smaller, the initial value needed in Newton method should be better. The initial value computed by one or two steps Picard method is already insufficient and thus more Picard iterations are needed. In addition, we

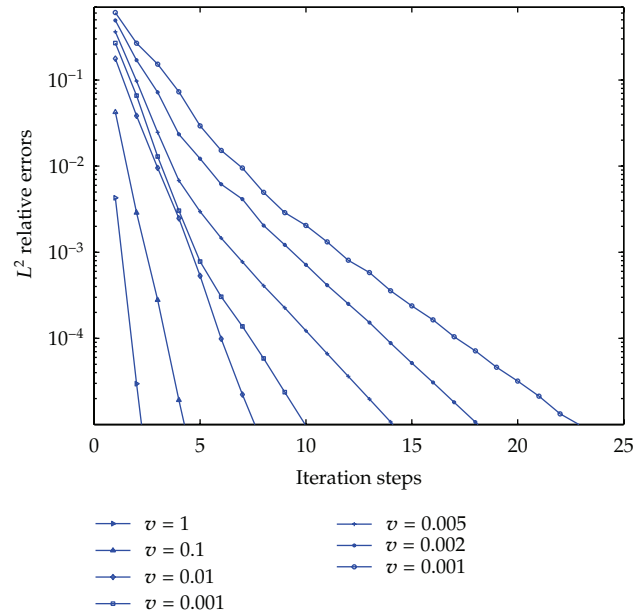


Figure 3: L^2 relative error of numerical velocity versus iteration steps for different ν .

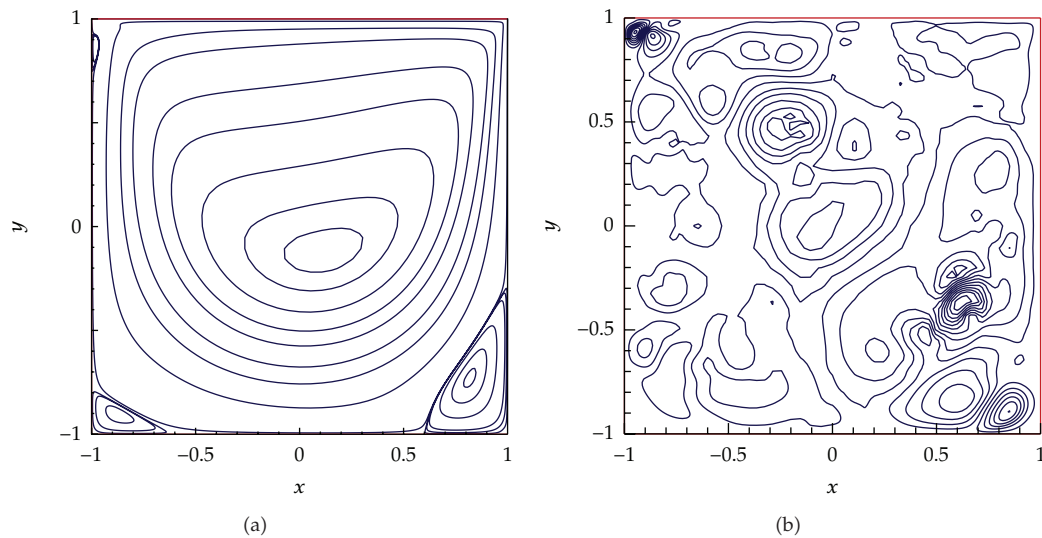


Figure 4: Nonconvergence streamlines for $\nu = 0.001$, $\beta = 10$ ((a) Stokes, (b) N9).

can also see that the convergence speed of Picard is not as fast as Newton: if the initial value is sufficient for Newton iteration, the convergence speed of Newton's method is faster than Picard's method.

Actually, the Picard method corresponds to a simple fixed point iteration strategy for solving (2.14) whose convection coefficient is evaluated at the current velocity. Thus, the rate of convergence of Picard method is only linear in general; whereas, for the added more linear

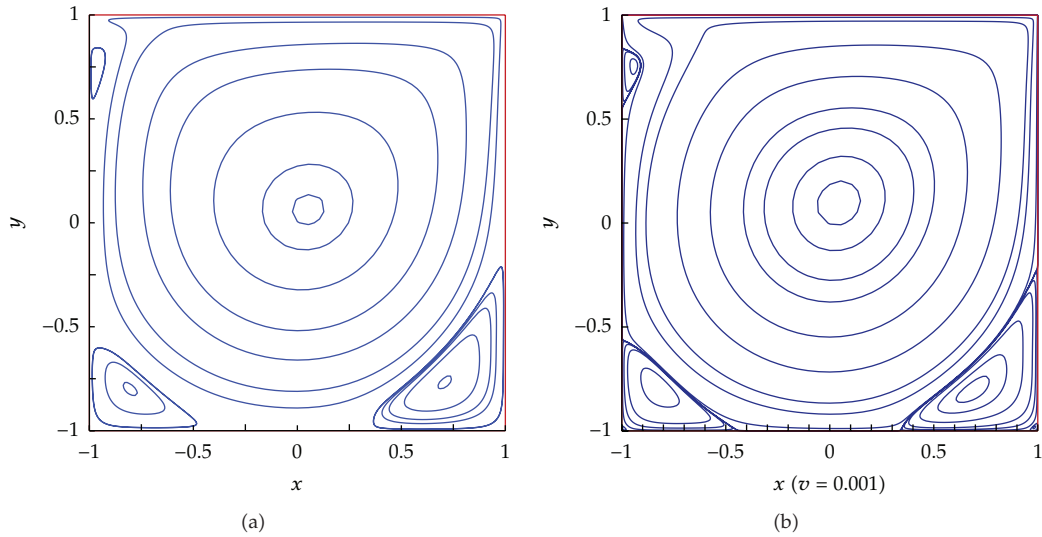


Figure 5: Streamlines for $\nu = 0.001$, $\beta = 10$ ((a) P2N0, (b) P2N4).

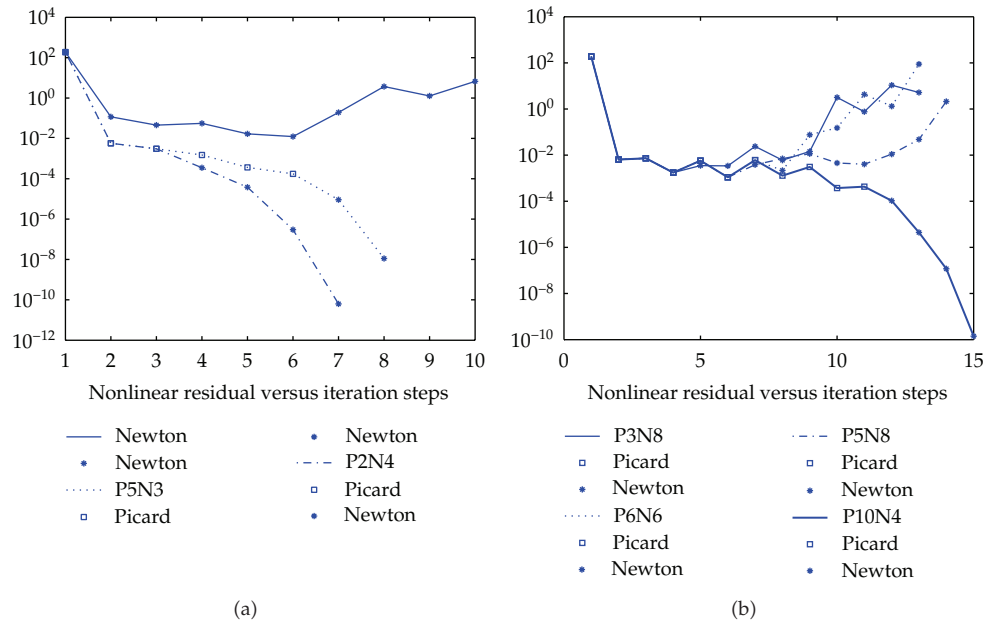


Figure 6: Nonlinear residual versus iteration steps ((a) $\nu = 0.001$, $\beta = 10$ and (b) $\nu = 0.00033$, $\beta = 20$).

term, if the initial value is sufficient close to a nonsingular solution, the Newton method is locally convergence quadratic (For more information see [18]).

It is necessary to pay attention to the “finest” number of Picard iteration in the computation of initial value for Newton iteration. Since the convergence radius of the Newton method is proportional to Reynolds number (namely, $1/\nu$) in general, in these computations, we roughly choose the times of Picard iteration to increase proportionately with Reynolds

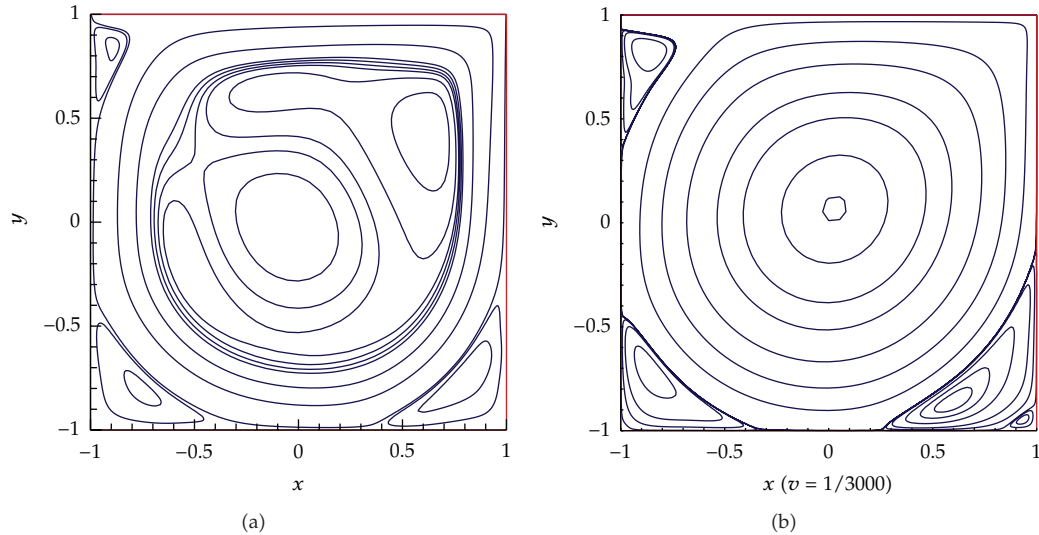


Figure 7: Streamlines for $\nu = 0.000333, \beta = 30$ ((a) P5N10 (wrong result), (b) P10N5 (right result)).

number. Many numerical tests show that this strategy is good enough for the success of the ensuing Newton iteration.

5. Conclusions

The main work in this paper is the demonstration of the optimal order in the L^2 error of the velocity and emphasis on some aspects of its associated numerical computation. Both the theoretical analysis and numerical results indicate the efficiency of the FVM for stationary Navier-Stokes equations.

Further, numerical computations show the convergence of Newton method is closely related to the viscosity ν . Thus, as it is decreased, better and better initial values are needed, whereas the advantage of Picard method is that, relative to Newton method, it has a much large region of trust of convergence. As a result, a good choice is to combine the Newton method with Picard method in computing, and thus more complicated problems can be solved efficiently.

Acknowledgments

The paper was subsidized by the NSF of China 10926133, 60973015, 70901012, and FRFCU ZYGX2009J098 and YF of UESTC 7X0775.

References

- [1] G. He and Y. He, "The finite volume method based on stabilized finite element for the stationary Navier-Stokes problem," *Journal of Computational and Applied Mathematics*, vol. 205, no. 1, pp. 651–665, 2007.
- [2] Y. He, A. Wang, and L. Mei, "Stabilized finite-element method for the stationary Navier-Stokes equations," *Journal of Engineering Mathematics*, vol. 51, no. 4, pp. 367–380, 2005.

- [3] R. Temam, *Navier-Stokes Equations*, vol. 2 of *Studies in Mathematics and its Applications*, North-Holland, Amsterdam, The Netherlands, 3rd edition, 1984.
- [4] P. G. Ciarlet, *The Finite Element Method for Elliptic Problems*, North-Holland, Amsterdam, The Netherlands, 1978.
- [5] V. Girault and P.-A. Raviart, *Finite Element Methods for Navier-Stokes Equations: Theory and Algorithms*, vol. 5 of *Springer Series in Computational Mathematics*, Springer, Berlin, Germany, 1986.
- [6] D. Kay and D. Silvester, "A posteriori error estimation for stabilized mixed approximations of the Stokes equations," *SIAM Journal on Scientific Computing*, vol. 21, no. 4, pp. 1321–1336, 1999/00.
- [7] N. Kechkar and D. Silvester, "Analysis of locally stabilized mixed finite element methods for the Stokes problem," *Mathematics of Computation*, vol. 58, no. 197, pp. 1–10, 1992.
- [8] R. L. Sani, P. M. Gresho, R. L. Lee, and D. F. Griffiths, "The cause and cure (?) of the spurious pressures generated by certain FEM solutions of the incompressible Navier-Stokes equations. I," *International Journal for Numerical Methods in Fluids*, vol. 1, no. 1, pp. 17–43, 1981.
- [9] R. Li, Z. Chen, and W. Wu, *Generalized Difference Methods for Differential Equations*, vol. 226 of *Monographs and Textbooks in Pure and Applied Mathematics*, Marcel Dekker, New York, NY, USA, 2000.
- [10] R. E. Ewing, T. Lin, and Y. Lin, "On the accuracy of the finite volume element method based on piecewise linear polynomials," *SIAM Journal on Numerical Analysis*, vol. 39, no. 6, pp. 1865–1888, 2002.
- [11] S. H. Chou and D. Y. Kwak, "Analysis and convergence of a MAC-like scheme for the generalized Stokes problem," *Numerical Methods for Partial Differential Equations*, vol. 13, no. 2, pp. 147–162, 1997.
- [12] X. Ye, "A discontinuous finite volume method for the Stokes problems," *SIAM Journal on Numerical Analysis*, vol. 44, no. 1, pp. 183–198, 2006.
- [13] R. A. Adams, *Sobolev Spaces*, Academic Press, New York, NY, USA, 1975.
- [14] R. Stenberg, "Analysis of mixed finite elements methods for the Stokes problem: a unified approach," *Mathematics of Computation*, vol. 42, no. 165, pp. 9–23, 1984.
- [15] W. Layton and L. Tobiska, "A two-level method with backtracking for the Navier-Stokes equations," *SIAM Journal on Numerical Analysis*, vol. 35, no. 5, pp. 2035–2054, 1998.
- [16] G. He, Y. Zhang, and H. Xiaoqin, "The locally stabilized finite volume method for incompressible flow," *Applied Mathematics and Computation*, vol. 187, no. 2, pp. 1399–1409, 2007.
- [17] F. H. Harlow and J. E. Welch, "Numerical calculation of time-dependent viscous incompressible flow of fluid with free surface," *Physics of Fluids*, vol. 8, no. 12, pp. 2182–2189, 1965.
- [18] H. C. Elman, D. J. Silvester, and A. J. Wathen, *Finite Elements and Fast Iterative Solvers: with Applications in Incompressible Fluid Dynamics*, Numerical Mathematics and Scientific Computation, Oxford University Press, New York, NY, USA, 2005.



Hindawi

Submit your manuscripts at
<http://www.hindawi.com>

